Strip Curtains Direct

PVC Strip Curtain Hook on Rail Hanging System

Beware of Sharp Edges

www.stripcurtainsdirect.co.uk
t: 0333 999 7171 e: sales@stripcurtainsdirect.co.uk

Installation

Please read these instructions before proceeding

1 Your order has been carefully prepared and in the packaging you will find strips of PVC and Suspension Rail(s).

The Suspension Rail(s) can be fitted on the face or soffit (see Fig 1). You will need M6 fixings not supplied.

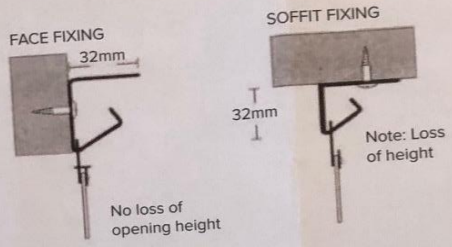

FIG 1

2 The Suspension Rails should be butted together if there are two or more. When fitting 300mm and 400mm strips the first and last strip will extend beyond the end of the suspension rail. When fitting the strip curtain between jambs you should allow the following measurements at each end (See Fig 2).

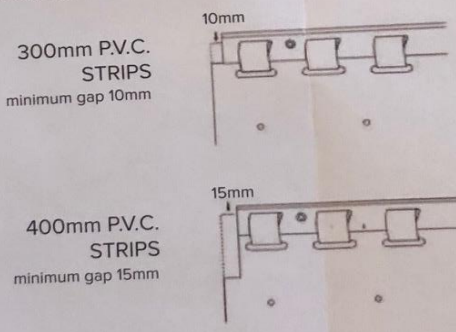

FIG 2

3 The delivery note details the specification of your order. You can achieve the correct overlap by hanging the first row of strips leaving out the correct number of fingers on the suspension rail. Hang the strips so that the flattened side of the rivets are back to back (See Fig 3).

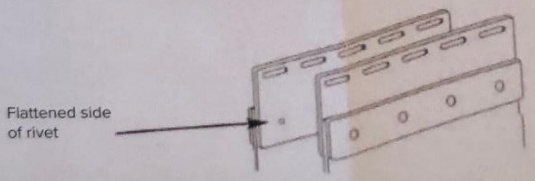

FIG 3

Each PVC strip should be trimmed 20mm above floor level to allow it to hang freely.

Specification

200mm P.V.C STRIP

36% overlap: leave 3 fingers showing

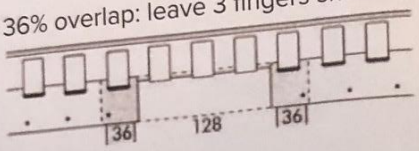

77% overlap: leave 1 finger showing

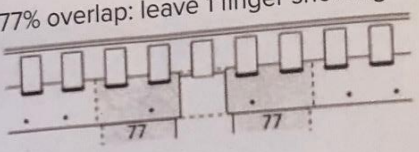

400mm P.V.C STRIP

56% overlap: leave 5 fingers showing

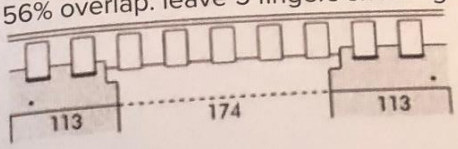

77% overlap: leave 3 fingers showing

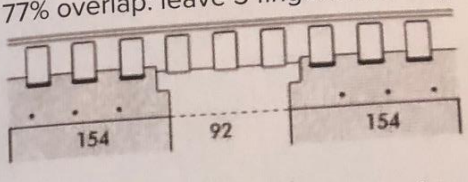

100% overlap: leave 1 finger showing

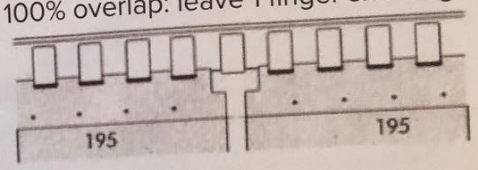

300mm P.V.C STRIP

36% overlap: leave 5 fingers showing

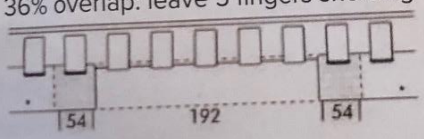

63% overlap: leave 3 fingers showing

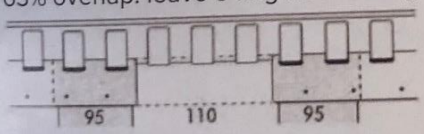

% overlap: leave 1 finger showing

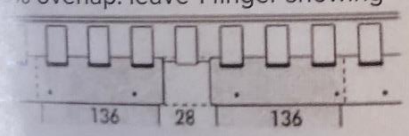

For more information visit us at
www.stripcurtainsdirect.co.uk
or call us on **0333 999 7171**
for an instant made to
measure quote

Strip Curtains Direct